


OSG protection tube is a part of measuring installation, where a sensing element (temperature sensor) is installed by means of a threaded connector. Protection tube needs to be welded. It is manufactured in accordance with individual client requirements.

Specification

Material*			
stainless steel 1.4541			
Dimensions*			
D x g	D ₁	D ₂	k
8 x 0,6 9 x 1 10 x 1,5 11 x 2 12 x 1,5 14 x 2 15 x 2	M10 x 1 M12 x 1 (1,5)	18	12
	G $\frac{1}{4}$ M14 x 1,5	20	12
	M16 x 1,5 G $\frac{3}{8}$	25	16
	M18 x 1,5 M20 x 1,5 G $\frac{1}{2}$	30	16
	M27 x 2 G $\frac{3}{4}$	36	20

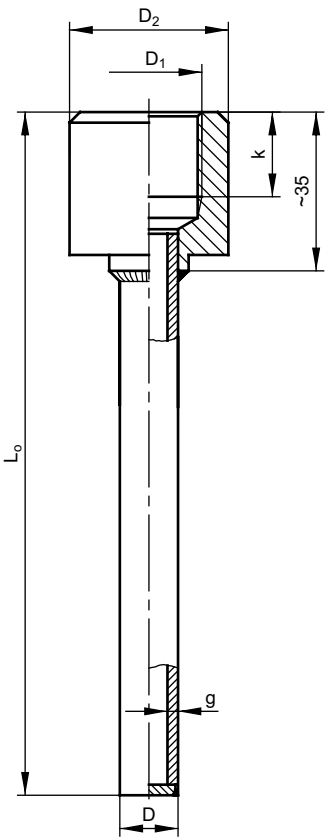

Protection tube length L₀ [mm] = 50÷2000
*other parameters acc. to requirements

Product code

Tube dimension D		
1	15	15mm
		other parameters acc. to requirements
Thread dimension D ₁		
2	G $\frac{1}{2}$	G $\frac{1}{2}$
		other parameters acc. to requirements
Protection tube length L ₀		
3	700	700m
		other parameters acc. to requirements

123

OSG – – –

Ordering example: Protection Tube OSG–10–M12x1–50