



DATA SHEET

CP 116



Atmospheric pressure transmitter



Measuring range from
800 to 1100 hPa



Indication of the pressure
in mbar, mmHG or hPa

- 0-10 V or 4-20 mA output, active, power supply 24 Vac/Vdc (3-4 wires) or 4-20 mA output, passive loop, power supply from 16 to 30 Vdc (2 wires)
- ABS V0 housing, IP65, with or without display
- "1/4 turn" system mounting with wall-mount plate
- Housing with simplified mounting system

Part number

CP 116

P

O

Power supply / Output

A: Active – 24 Vac/Vdc – 0-10 V or 4-20 mA
P: Passive – 16/30 Vdc – 4-20 mA


Display

O: With display
N: Without display

Example: CP 116 – PO

Transmitter of atmospheric pressure, passive transmitter 16/30 Vdc, with display.

Features of the housing

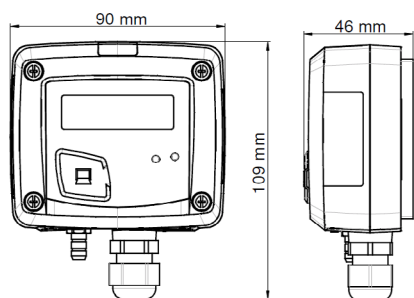

Material

ABS V0 as per UL94

Protection

IP65

Display

LCD 10 digits. Size: 50 x 17 mm
Height of digits: Value: 10 mm; Unit: 5 mm

Connections

Ribbed, Ø 6.2 mm

Cable gland

For cables Ø 8 mm maximum

Weight

143 g

General features

Measurement units

mbar, hPa, mmHG

Accuracy*

±3 hPa

Response time

< 10 seconds

Resolution

1 mbar; 1 hPa; 1 mmHG

Type of fluid

Air and neutral gases

Tolerated overpressure

4136 hPa

Conditions of use (°C/%RH/m)

From 0 to +50 °C. In non-condensing condition. From 0 to 2000 m.


Storage temperature

From -10 to +70 °C

Technical specifications

Output / Power supply	Active sensor 0-10 V or 4-20 mA (alim. 24 Vac/Vdc $\pm 10\%$), 3-4 wires Passive loop 4-20 mA (power supply 16/30 Vdc), 2 wires Common mode voltage <30 VAC Maximum load: 500 Ohms (4-20 mA) / minimum load: 1 K Ohms (0-10 V)
Consumption	2 VA (0-10 V) or 0.6 VA (4-20 mA)
European directives	2014/30/EU EMC; 2014/35/EU Low Voltage; 2011/65/EU RoHS II; 2012/19/EU WEEE
Electrical connection	Screw terminal block for cables from 0.05 to 2.5 mm ² or from 30 to 14 AWG Carried out according to the code of good practice
PC Communication	USB-mini DIN cable
Environment	Air and neutral gases


Connections



Inside the front housing



Removable front face



Fixed back housing


- | | | | |
|--------------------|------------------------|--------------------------------|----------------|
| 1. Inactive switch | 3. Pressure connection | 5. Output terminal block | 7. Cable gland |
| 2. Active switch | 4. LCC-S connection | 6. Power supply terminal block | |

Electrical connections as per NFC15-100 standard




This connection must be made by a qualified and trained technician. To make the connection, the transmitter must not be energized.


For CP116-AO and CP116-AN models with 0-10 V or 4-20 mA output – active, 4 wires:

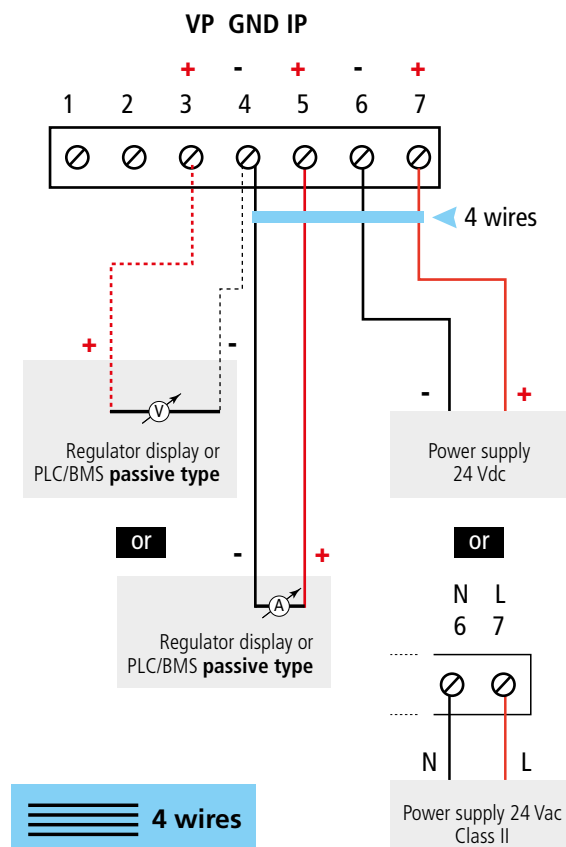

To make a 3-wire connection, before powering up the transmitter, please connect the output ground to the input ground. See drawing below.

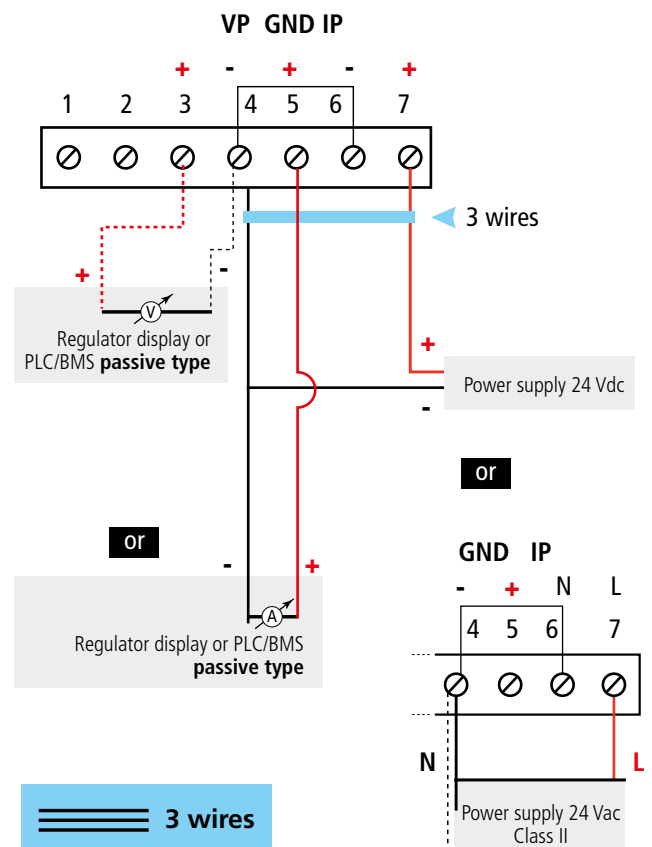

For CP116-PO and CP116-PN models with 4-20 mA output – passive:

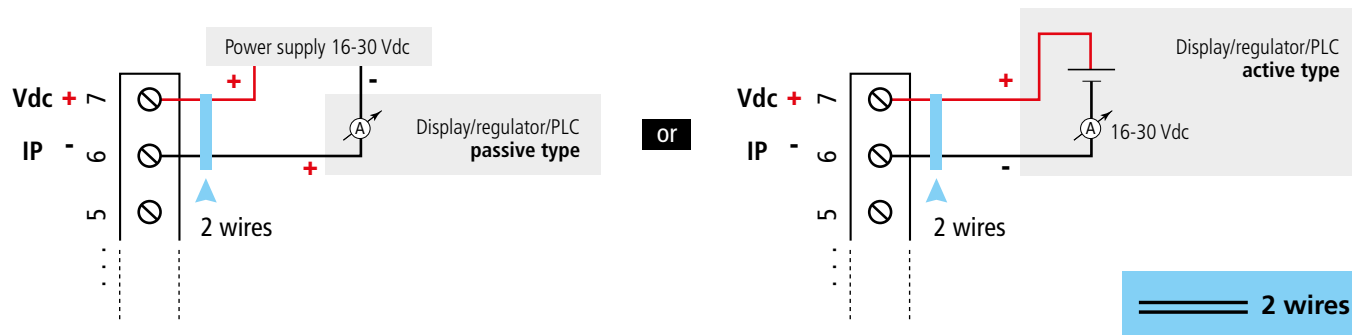


Settings and use of the transmitter

Configuration



To configure the transmitter, it must not be energized. Then, you can make the settings required, with the DIP switches (as shown on the drawing below). When the transmitter is configured, you can power it up.


To configure the transmitter, unscrew the 4 screws from the housing then open it. DIP switches allowing the different settings are then accessible.



Please follow carefully the combinations beside with the DIP switch. If the combination is wrongly done, the following message will appear on the display of the transmitter "CONF ERROR". In that case, you will have to unplug the transmitter, place the DIP switches correctly, and then power the transmitter up.


Output setting – active switch

To set the type of analogue output, please put the on-off switch of the output as shown beside.



Units setting – active switch

To set a measurement unit, put the on-off switches 2, 3 and 4 of the units as shown in the table below.

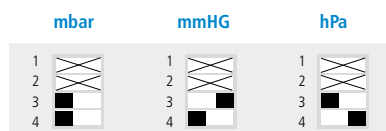

Configuration via LCC-S software (option)

An easy and friendly configuration with the software!

To access the configuration via software:

- Set the DIP switches as shown beside. Nota: the on-off switch 1 of the active DIP switch can be in any position (selection of the analogue output 0-10 V or 4-20 mA).
- Connect the cable of the LCC-S to the connection of the transmitter.




Please refer to the user manual of the LCC 100 to make the configuration.

Caution: the configuration of the parameters can be done either with the DIP switch or via software (you can not combine both solutions).

Mounting

To mount the transmitter, mount the ABS plate on the wall (drilling: Ø 6 mm, screws and pins are supplied).

Insert the transmitter on the fixing plate (see A on the drawing beside). Rotate the housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.

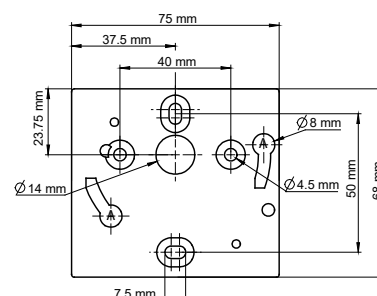

Maintenance: please avoid any aggressive solvent. Please protect the transmitter and its probes from any cleaning product containing formalin, that may be used for cleaning rooms or ducts.

Precautions for use: please always use the device in accordance with its intended use and within parameters described in the technical features in order not to compromise the protection ensured by the device.

Accessories

Ref.	Description
KIAL-100A	Power supply class 2, 230 Vac input, 24 Vac output
KIAL-100C	Power supply class 2, 230 Vac input, 24 Vdc output
LCC-S	Configuration software with USB cable

Connection tube/Connection fittings/Through connections/Straight connections/Spherical coupling nut



Only the accessories supplied with the device must be used.