

SMART PRESSURE TRANSMITTER APCE-2000



- ✓ **4...20 mA output signal + HART protocol**
- ✓ **ATEX Intrinsic safety**
- ✓ **Accuracy 0.1%**
- ✓ **Rangeability 100:1**
- ✓ **Gold plated diaphragm (Au)**

Application

The APCE-2000 pressure transmitter is applicable to the measurement of the pressure, underpressure or absolute pressure of gases, vapours and liquids. The active sensing element is a piezoresistant silicon sensor separated from the medium by a diaphragm and by specially selected type of manometric liquid.

PD version


Economical version:

- housing 304ss
- protection IP65
- electrical connection
DIN EN 175301-803
- the electronics encased in
a protective silicon gel

APCE-2000PD




APCE-2000PZ



PZ version

Version designed to work in hard conditions:

- housing material: 304SS
- protection IP66
- the electronics encased
in a protective silicon gel
- cup with knurled handgrip

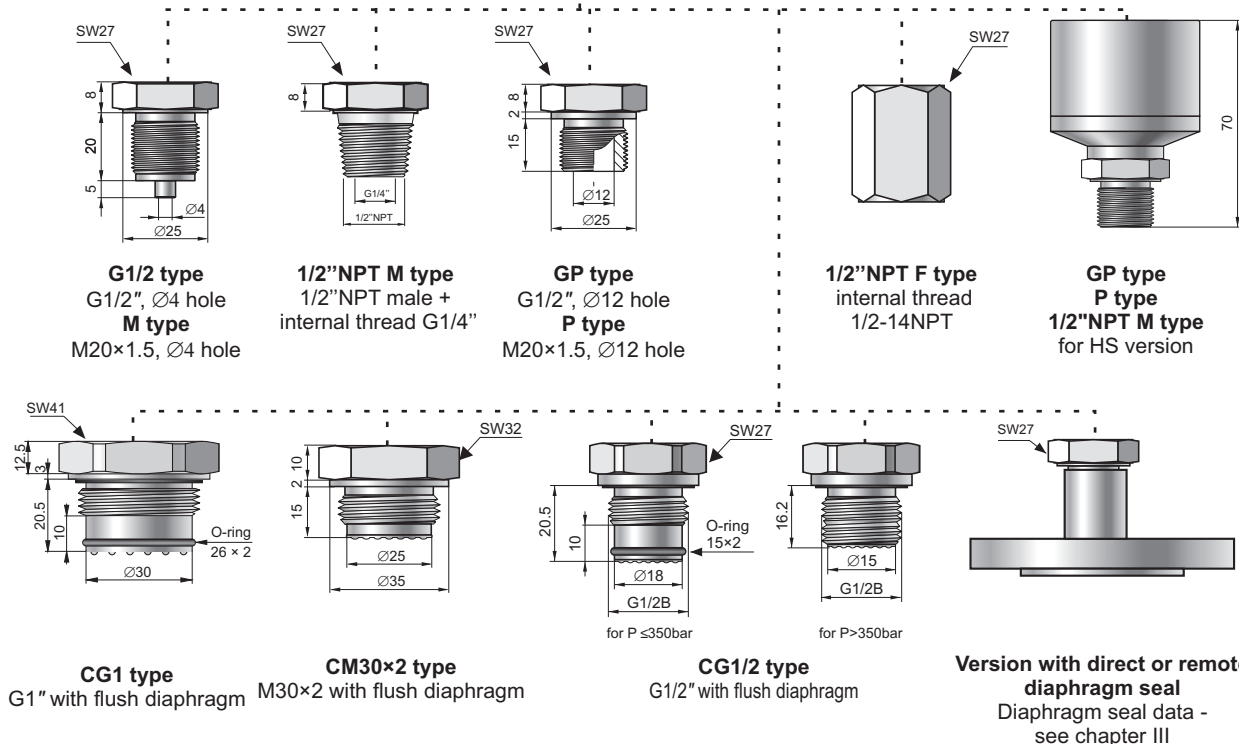

Communication and configuration

The communication standard for data interchange with the transmitter is the Hart protocol. The data interchange with the transmitter enables users to:

Communication with the transmitter is carried out with:

- a KAP-03, KAP-03Ex communicator
- some other Hart type communicators, (*)
- a PC using an HART/USB converter and Raport 2 configuration software.

(*) .eddl files available on www.aplisen.com.

- ◆ identify the transmitter
- ◆ configure the output parameters:
 - measurement units and the values of the start points and end points at the measurement range
 - damping time constant
 - conversion characteristic (inversion, user's non-linear characteristic)
- ◆ read the currently measured pressure value of the output current and the percentage output control level
- ◆ force an output current with a set value
- ◆ calibrate the transmitter in relation to a model pressure

Installation

The transmitter is not heavy, so it can be installed directly on the installation without additional mounting bracket. When the pressure of steam or other hot media is measured, a siphon or impulse line should be used. The needle valve placed upstream the transmitter simplifies installation process and enables the zero point adjustment or the transmitter replacement. When the special process connections are required for the measurement of levels and pressures (e.g. at food and chemical industries), the transmitter is provided with an Aplisens diaphragm seal. Installing accessories and a full scope of diaphragm seals are described in detail in the further part of the catalogue. The transmitter's electrical connections should be performed with twisted cable. The place for the communicator should be assigned before the communicator installation.

Measuring ranges

No.	Nominal measuring range (FSO)	Minimum set range	Rangeability	Overpressure limit (without hysteresis)****
1	0...1000 bar (0...100 MPa)	10 bar (1 MPa)	100:1	1200 bar (120 MPa)
2	0...600 bar (0...60 MPa)	6 bar (600 kPa)	100:1	1200 bar (120 MPa)
3	0...300 bar ** (0...30 MPa)	3 bar (300 kPa)	100:1	450 bar (45 MPa)
4	0...160 bar ** (0...16 MPa)	1,6 bar (160 kPa)	100:1	450 bar (45 MPa)
5	0...70 bar ** (0...7 MPa)	0,7 bar (70 kPa)	100:1	140 bar (14 MPa)
6	-1...70 bar ** (-0,1...7 MPa)	0,71 bar (71 kPa)	100:1	140 bar (14 MPa)
7	0...25 bar ** (0...2,5 MPa)	0,25 bar (25 kPa)	100:1	50 bar (5 MPa)
8	0...7 bar ** (0...0,7 MPa)	0,07 bar (7 kPa)	100:1	14 bar (1,4 MPa)
9	-1...25 bar ** (-0,1...2,5 MPa)	0,26 bar (26 kPa)	100:1	50 bar (5 MPa)
10	-1...7 bar ** (-100...700 kPa)	0,08 bar (8 kPa)	100:1	14 bar (1,4 MPa)
11	-1...1,5 bar ** (-100...150 kPa)	0,12 bar (12 kPa)	20:1	4 bar (400 kPa)
12	0...2 bar ** (0...200 kPa)	100 mbar (10 kPa)	20:1	4 bar (400 kPa)
13	0...1 bar ** (0...100 kPa)	50 mbar (5 kPa)	20:1	2 bar (200 kPa)
14	-0,5...0,5 bar ** (-50...50 kPa)	50 mbar (5 kPa)	20:1	2 bar (200 kPa)
15	0...0,25 bar ** (0...25 kPa)	25 mbar (2,5 kPa)	10:1	1 bar (100 kPa)
16	-100...100 mbar ** (-10...10 kPa)	20 mbar (2 kPa)	10:1	1 bar (100 kPa)
17	-15...70 mbar */*** (-1,5...7 kPa)	5 mbar (0,5 kPa)	17:1	0,5 bar (50 kPa)
18	-25...25 mbar */*** (-2,5...2,5 kPa)	2 mbar (0,2 kPa)	25:1	0,5 bar (50 kPa)
19	-7...7 mbar */*** (-0,7...0,7 kPa)	1 mbar (0,1 kPa)	14:1	0,5 bar (50 kPa)
20	0...1,3 bar abs (0...130 kPa abs)	100 mbar abs (10 kPa abs)	13:1	2 bar (200 kPa)
21	0...7 bar abs (0...0,7 MPa abs)	100 mbar abs (10 kPa abs)	70:1	14 bar (1,4 MPa)
22	0...25 bar abs (0...2,5 MPa abs)	0,25 bar abs (25 kPa abs)	100:1	50 bar (5 MPa)
23	0...70 bar abs (0...7 MPa abs)	0,7 bar abs (70 kPa abs)	100:1	140 bar (14 MPa)
24	0...300 bar abs (0...30 MPa abs)	3 bar abs (300 kPa abs)	100:1	450 bar (45 MPa)

* transmitters not available with diaphragm seal

*** transmitters available only in HS version

** transmitters available in HS version

**** overpressure limit can be different for version according to PED norm No. 97/23/EC

Technical data

Metrological parameters

Accuracy	≤ ±0,1% of the calibrated range
Long-term stability (for the nominal measuring range)	≤ accuracy for 3 years or ≤ 2 x accuracy for 5 years HS version: ≤ accuracy for 6 years or ≤ 2 x accuracy for 10 years
Thermal error	< ±0,08% (FSO) / 10°C 0,1% for ranges no. 16+19 max. ±0,25% (FSO) in the whole compensation range (0,4% for ranges 16+19)
Thermal compensation range	-25...80°C Special version: -40...80°C
Response time	16...230ms (programmable)
Additional electronic damping	0...60 s
Error due to supply voltage changes	0,002% (FSO) / V

Electrical parameters

Power supply	7,5...55 VDC (Ex ia 7,5...30 VDC)
Output signal	4...20 mA + HART
Load resistance	$R[\Omega] \leq \frac{U_{sup}[V] - 7,5V}{0,0225A}$
Resistance required for communication	min. 240 Ω

Materials

Wetted parts and diaphragms:	SS316L, Hastelloy C 276, Au
Casing:	SS304


Operating conditions

Operating temperature range (ambient temp.)	-40...85°C
Ex version	-40...80°C
Medium temperature range	-40...120°C

over 120°C – measurement with use an impulse line or diaphragm seals
up to 100°C – PED version

CAUTION: the medium must not be allowed to freeze in the impulse line or close to the process connection of the transmitter

Accuracy depending on the set range

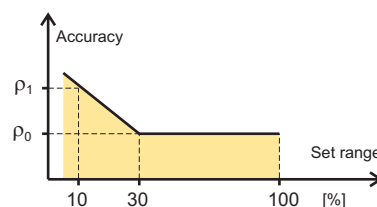

p_0 – error for range 30...100% FSO

p_1 – error for range 10% FSO; $p_1 = 2 \times p_0$

Numerical error values are given in the technical data under metrological parameters

Ordering procedure

Model	Code	Description
APCE-2000		Smart pressure transmitter
Casing, output signal, electrical connection	/PD..... /PZ.....	Housing IP65 with DIN EN 175301-803 connector, without display, output 4-20mA + Hart 304SS housing, IP66, without display, output 4-20mA + Hart packing gland M20x1,5
Versions, certificates	/Exia..... /PED..... /HS..... /Tlen..... /-40...80°C.....	 II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb II 1D Ex ia IIIC T110°C Da I M1 Ex ia I Ma Exia for HS version available from Q4/2016 European Pressure Equipment Directive N° 97/23/EC, category IV not available for transmitters with Hastelloy C 276 wetted parts Ultra stable version (only ranges no. 3+19, process connections: P, GP and ½"NPTM) For oxygen service (sensor filled with Fluorolube fluid), only G1/2" connection Extended thermal compensation range -40 ÷ 80°C
more than one option is available		
Nominal measuring range	/0+1000 bar.....	Range: 0+1000 bar (0+100 MPa) Min. set range: 10 bar (1 MPa)
	/0+600 bar.....	Range: 0+600 bar (0+60 MPa) Min. set range: 6 bar (600 kPa)
	/0+300 bar.....	Range: 0+300 bar (0+30 MPa) Min. set range: 3 bar (300 kPa)
	/0+160 bar.....	Range: 0+160 bar (0+16 MPa) Min. set range: 1,6 bar (160 kPa)
	/0+70 bar.....	Range: 0+70 bar (0+7 MPa) Min. set range: 0,7 bar (70 kPa)
	/-1+70 bar.....	Range: -1+70 bar (-0,1+7 MPa) Min. set range: 0,71 bar (71 kPa)
	/0+25 bar.....	Range: 0+25 bar (0+2,5 MPa) Min. set range: 0,25 bar (25 kPa)
	/-1+25 bar.....	Range: -1+25 bar (-0,1+2,5 MPa) Min. set range: 0,26 bar (26 kPa)
	/0+7 bar.....	Range: 0+7 bar (0+700 kPa) Min. set range: 0,07 bar (7 kPa)
	/-1+7 bar.....	Range: -1+7 bar (-100+700 kPa) Min. set range: 0,07 bar (7 kPa)
	/-1+1,5 bar.....	Range: -1+1,5 bar (-100+150 kPa) Min. set range: 120 mbar (12 kPa)
	/0+2 bar.....	Range: 0+2 bar (0+200 kPa) Min. set range: 100 mbar (10 kPa)
	/0+1 bar.....	Range: 0+1 bar (0+100 kPa) Min. set range: 50 mbar (5 kPa)
	/-0,5+0,5 bar.....	Range: -0,5+0,5 bar (-50+50k Pa) Min. set range: 50 mbar (5 kPa)
	/0+0,25 bar.....	Range: 0+0,25 bar (0+25 kPa) Min. set range: 25 mbar (2,5 kPa)
	/-100+100 mbar.....	Range: -100+100 mbar (-10+10 kPa) Min. set range: 20 mbar (2 kPa)
	/-15+70 mbar.....	Range: -15+70 mbar (-1,5+7 kPa) Min. set range: 5 mbar (0,5 kPa)
	/-25+25 mbar.....	Range: -25+25 mbar (-2,5+2,5 kPa) Min. set range: 2 mbar (0,2 kPa)
	/-7+7 mbar.....	Range: -7+7 mbar (-0,7+0,7 kPa) Min. set range: 1 mbar (0,1 kPa)
	/0+1,3 bar ABS.....	Range: 0+1,3 bar ABS (0+130 kPa ABS) Min. set range: 0,1 bar ABS (10 kPa ABS)
	/0+7 bar ABS.....	Range: 0+7 bar ABS (0+700 kPa ABS) Min. set range: 0,1 bar ABS (10 kPa ABS)
	/0+25 bar ABS.....	Range: 0+25 bar ABS (0+2,5 MPa ABS) Min. set range: 0,25 bar ABS (25 kPa ABS)
	/0+70 bar ABS.....	Range: 0+70 bar ABS (0+7 MPa ABS) Min. set range: 0,7 bar ABS (70 kPa ABS)
	/0+300 bar ABS.....	Range: 0+300 bar ABS (0+30 MPa ABS) Min. set range: 0,3 bar ABS (30 kPa ABS)
Measuring set range	/...÷... [required units]	Calibrated range in relation to 4mA and 20mA output
Process connections	/M.....	Thread M20x1,5 (male) with Ø4 hole, wetted parts SS316L
	/G1/2.....	Thread G1/2" (male) with Ø4 hole, wetted parts SS316L
	/G1/2(Au).....	Thread G1/2" (male) with Ø4 hole, gold plated diaphragm (range no. 1, 2, 3, 4, 5)
	/P.....	Thread M20x1,5 (male) with Ø12 hole, wetted parts SS316L
	/GP.....	Thread G1/2" (male) with Ø12 hole, wetted parts SS316L
	/GP(Hastelloy).....	Thread G1/2" (male) with Ø12 hole, wetted parts Hastelloy C 276
	/CM30x2.....	Thread M30x2 with flush diaphragm, wetted parts SS316L (Pressure limits: min. 0,1bar / max. 70bar)
	/CM30x2(Hastelloy).....	Thread M30x2 with flush diaphragm, wetted parts Hastelloy C 276 (Pressure limits: min. 0,1bar / max. 70bar)
	/CG1".....	Thread G1" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 0,1bar / max. 70bar)
	/CG1"(Hastelloy).....	Thread G1" with flush diaphragm, wetted parts Hastelloy C 276 (Pressure limits: min. 0,1bar / max. 70bar)
	/CG1/2".....	Thread G1/2" with flush diaphragm, wetted parts SS316L (Pressure limits: min. 2,5bar)
	/1/2"NPTM.....	Thread 1/2"NPT Male, G1/4" Female, wetted parts SS316L Pressure limits: ½"NPT Male max. 690bar, G1/4" Female max. 1000bar
	/1/2"NPTF.....	Thread M20x1,5 with adapter to 1/2"NPT Female, wetted parts SS316L (Pressure limits: max. 690bar)
	/code of diaphragm seal.....	Diaphragm seal (see chapter of diaphragm seals)
Other specification	/.....	Description of required parameters (e.g. non-standard pr/ connection G3/4", M22x1,5)

Example : Pressure transmitter , output 4..20mA + HART, version Exia, nominal measuring range 0..7bar, calibrated range 0..6bar, process connection G1/2", electrical connection DIN EN 175301-803 connector.

APCE-2000PD/Exia/0..7bar/0..6bar/G1/2"