



AP 108

Temperature sensor suitable for measurement of liquid and gaseous media. It has a replaceable measuring insert adequate for various industrial applications. Replacement of the measuring insert does not cause the technological installation damage. Spring-loaded insert ensures an excellent connection with the bottom of the sensor thermowell.

Temperature sensor has ATEX approval for application in hazardous area:

I M2 Ex d I Mb (with connection head NS)

II 2G Ex d IIC T6 Gb

II 2D Ex t IIIC T85°C Db IP66

Specification

Temperature range / sensing element

-200÷550°C	Pt100	class B
-40÷550°C	J, K,	class2

Measuring insert


- 2-, 3-, 4-wire connection (for Pt100)
- 2-, 3-wire connection (for 2xPt100)
- insert length [mm]: L+159
- measuring insert diameter [mm]: 6 (thermowell 24 and 32)
8 (thermowell 18)

Thermowell

- material: steel 1.7335 (15HM) or 1.4541
- diameter [mm] ø18h7, 24h7, 32h7
- dimension L/L₁, 100/ 35, 140/ 65, 200/ 65, 260/ 125 (for ø18)
140/ 65, 200/ 65, 260/ 125 (for ø24, 32)

Connection head

- aluminium
- XD-AD (AS1 – one cable gland, AS2 – two cable glands),
- aluminium, cover with window (for display)
- XD-ADwin (AS3 – one cable gland, AS4 – two cable glands),
- stainless steel connection head
- XD-SD (NS1 – one cable gland, NS2 – two cable glands),
- cable gland: ATEX II 2 GD; ATEX I M2; IP 66÷68
- cable diameter: 3÷14,3mm (standard 6,1÷11,7mm)

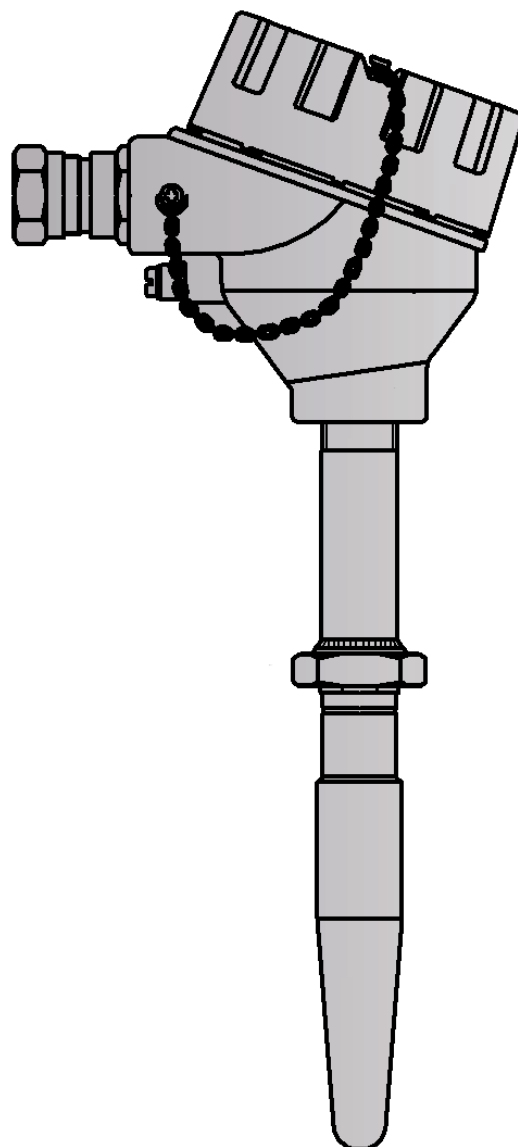

Other parameters acc. to requirements

Options

Temperature transmitter application

Temperature transmitter with standard 4÷20mA, 0÷10V output signals and with the HART or PROFIBUS communication protocols can be mounted in the connection head. Transmitter installation is carried out directly on the measuring insert (in place of a terminal block).


Local display application

The temperature sensor can be equipped with the connection head enabling the local LED display installation. The local display operates in current loop 4÷20mA. This version makes the local temperature reading and transmission of the analogue signal possible.

Non-standard design

Immersion length, flange dimensions, shape and material of the thermowell and the measuring insert parameters can be customized per client request

Calibrations performed by Limatherm Sensor Sp. z o.o. are confirmed with the Calibration Certificate of the Accredited Laboratory for Temperature Measurements.

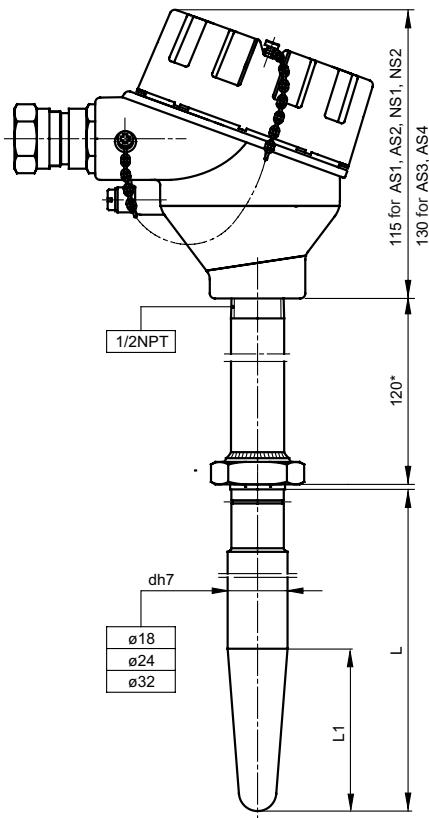

Standard length

Immersion length L [mm]	Measuring insert length L _w [mm]
100	259
140	299
200	359
260	419

Tolerance for classes of sensors with resistors Pt acc. to PN-EN 60751

Sensor classes	Range of application [°C]	Formula for calculating acceptable deviations [°C]
AA	-50÷250	$T = \pm(0,10 + 0,0017 t)$
A	-100÷450	$T = \pm(0,15 + 0,002 t)$
B	-196÷600	$T = \pm(0,3 + 0,005 t)$

|t| - absolute value of temperature

Measurement circuit


1 x Pt100			2 x Pt100			1 x TC	2 x TC
2-wire	3-wire	4-wire	2-wire	3-wire	4-wire	2-wire	2-wire
✓	✓	✓	✓	✓	x	✓	✓

Tolerance for thermocouple classes acc. to PN-EN 60584

Thermocouple type	Class 1		Class 2	
	Range of application [°C]	Tolerance [°C]	Range of application [°C]	Tolerance [°C]
J Fe-CuNi	from -40 to +375 from +375 to +750	±1,5 ±0,004 t	from -40 to +333 from +333 to +750	±2,5 ±0,0075 t
K NiCr-NiAl	from -40 to +375 from +375 to +1000	±1,5 ±0,004 t	from -40 to +333 from +333 to +1200	±2,5 ±0,0075 t

|t| - absolute value of temperature


Thermocouple hot junction types

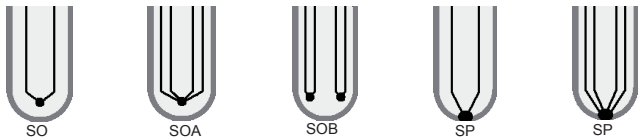


Connection head types

Connection head type AS1 in standard.


Possibility to mount different type of a connection head.

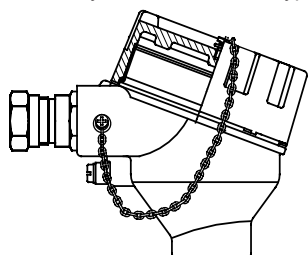

AS-1,2

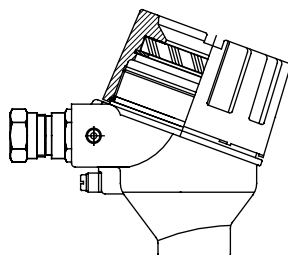


AS-3,4

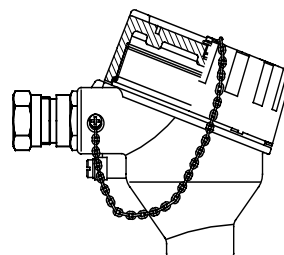


NS-1,2

Connection schemes

Pt100 (thermometric resistor)

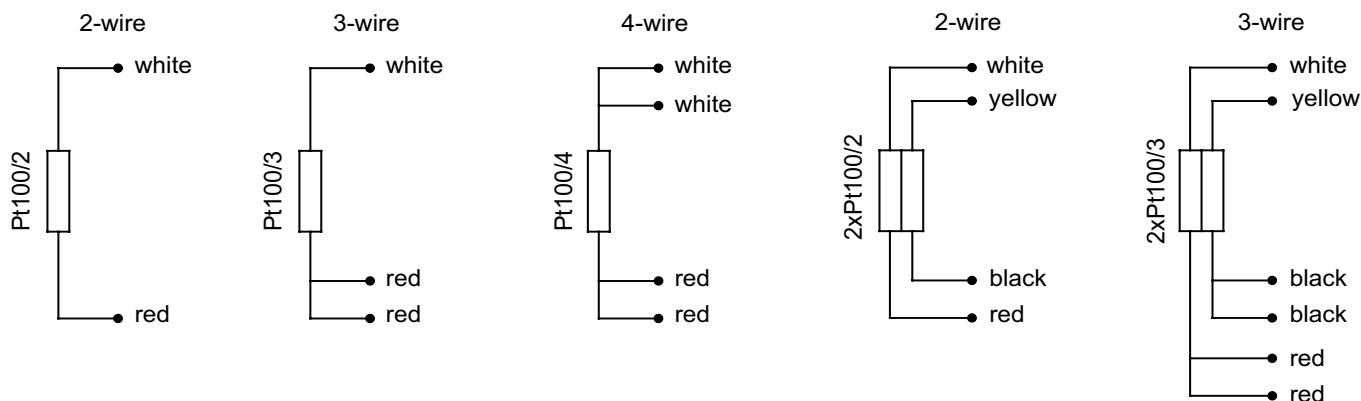


TC (thermocouple)

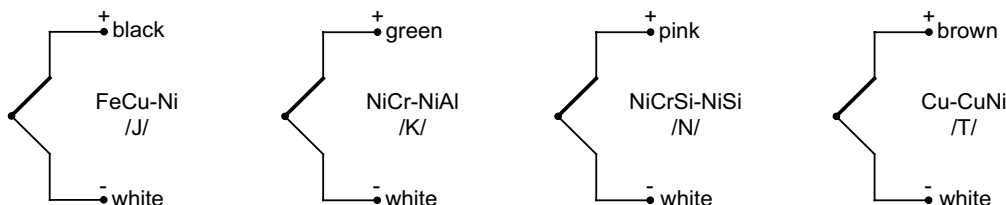

In double sensors one of thermocouples is additionally marked out.

Transmitters

Local LED display

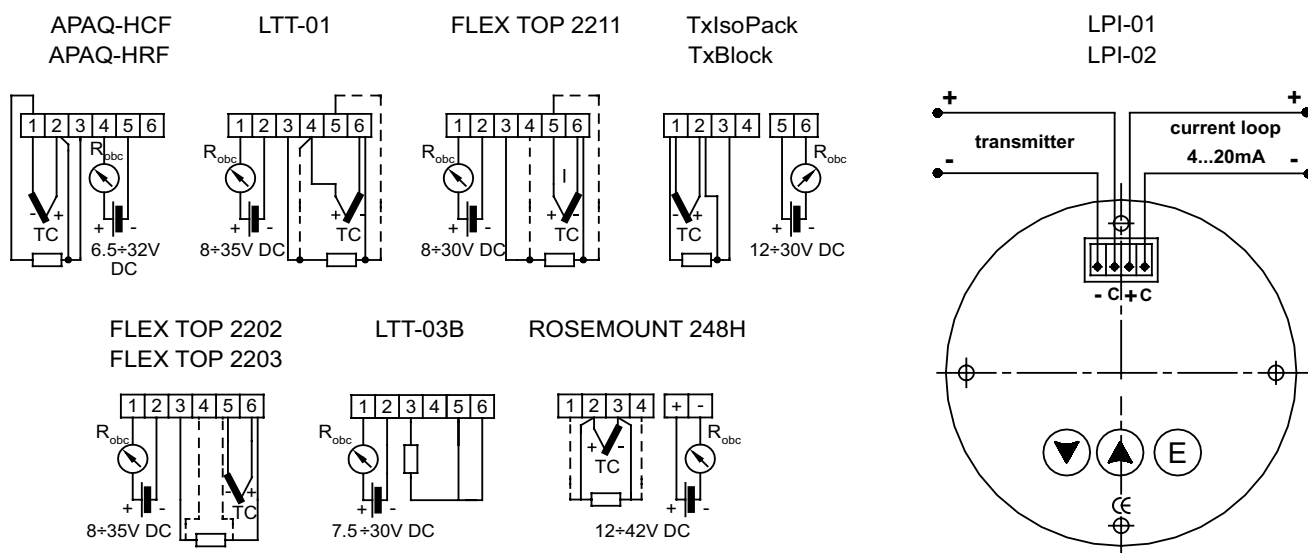

Product code

1	<input type="text"/>	Sensor version	
		no designation	single
		2	double
		AP	with transmitter
2	<input type="text"/>	Sensing element	
		OP	resistor Pt
		TJ	thermocouple Fe-CuNi /J/
		TK	thermocouple NiCr-NiAl /K/
		TN	thermocouple NiCrSi-NiSi /N/
		TT	thermocouple Cu-CuNi /T/
3	<input type="text"/>	Connection head type	
		AS-1, AS2	aluminium connection head for sensors
		AS-3, AS-4	aluminium connection head with window
		NS1, NS2	stainless steel connection head
4	<input type="text"/>	Thermowell material	
		1.4541	acid-resistant steel
		1.7335	boiler steel
5	<input type="text"/>	Immersion length / Sheath diameter	
		200/18	200mm/ø18mm
			other parameters acc. to requirements
6	<input type="text"/>	Accuracy	
		aA** lub aB**	for resistor Pt (** a=1 for Pt100, a=5 for Pt500, a=10 for Pt1000)
		1 or 2	for thermocouple
7	<input type="text"/>	Measurement circuit (for resistor) / hot junction type for TC	
		2	2 - wire
		3	3 - wire
		4	4 - wire
		SO	insulated hot junction
		SP	grounded hot junction
		SOA	one hot junction for two thermocouples insulated from the thermowell
		SOB	two hot junctions insulated from each other and from the thermowell
8	<input type="text"/>	Transmitter type (optionally)	
		Tx	head mounted transmitter TxBlock
			other parameters acc. to requirements
9	<input type="text"/>	Temperature range of transmitter	
		(0÷100°C)	transmitter configured for temperature range 0÷100°C
			other parameters acc. to requirements
10	<input type="text"/>	Cable diameter for cable gland	
		a	3,2mm÷8,7mm
		b	6,1mm÷11,7mm (standard)
		c	6,5mm÷14mm

1

2

3

4

5

6

7

8

9

10

T

SW

-

Exd

-

-

-

-

-

-

-

Ordering example: APTKSW-Exd-NS1-1.4541-140/24-1-SO-APAQ-(0÷250)°C-b