



AP 108

This sensor is used for temperature measurement of liquid and gaseous media. The temperature sensor design (replaceable measuring insert) is suitable for various industrial applications. Replacement of the measuring insert does not cause the technological installation damage. Spring-loaded insert ensures an excellent connection with the bottom of the sensor thermowell.

Specification

Temperature range / sensing element

-200+550°C	Pt100	class B
-40+550°C	K, J	class 2

Measuring insert

- pipe or mineral insulated version
- 2-, 3-, 4-wire connection (for Pt100)
- 2-, 3-wire connection (for 2xPt100)

Thermowell

- material: steel 1.4541
- length [mm]: 85÷2000

Connection head

- BA, IP55, -40÷100°C

Process connection

- M20x1,5; G½

Other parameters acc. to requirements

Options

Temperature transmitter application

Temperature transmitter with standard 4÷20mA, 0÷10V output signals and with the HART or PROFIBUS communication protocols can be mounted in the connection head. Transmitter installation is carried out directly on the measuring insert (in place of a terminal block) or in the high cover connection head (solution used to enable installation of two transmitters).

Local display application

The temperature sensor can be equipped with the connection head enabling the local LED display installation. The local display operates in current loop 4÷20mA. This version makes the local temperature reading and transmission of the analogue signal possible.

ATEX design


For explosion zones adequate sensor constructions are available:

- intrinsically safe Exi
- flameproof Exd


These designs possess EC-Type Examination Certificate in compliance with 94/9/EC(ATEX) directive.

Non-standard design

Immersion length, process connection thread, shape and material of the thermowell, connection head type and the measuring insert parameters can be customized per client request.

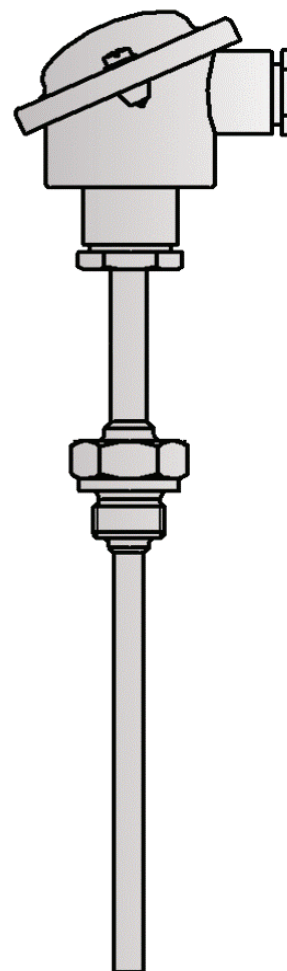

Calibrations performed by Limatherm Sensor Sp. z o.o. are confirmed with the Calibration Certificate of the Accredited Laboratory for Temperature Measurements.

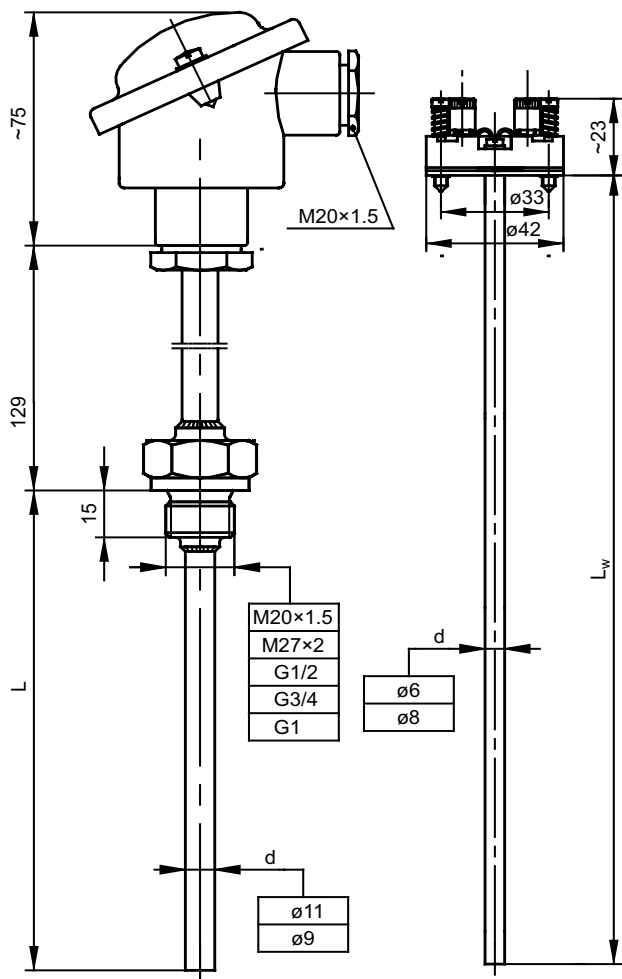

Standard length


Immersion length L [mm]	Measuring insert length L _w [mm]
100	255
160	315
200	355
250	405

Maximum pressure

Length L [mm]	Maximum pressure [MPa]	
	ø9	ø11
do 160	6.4	11.8
do 250	4.9	6.9
do 400	2.0	4.4

Values specified on the basis of the maximum speed of steam flow: 25 m/s and water flow: 3 m/s with thermowell standard diameter 9 mm.

Thermocouple hot junction types

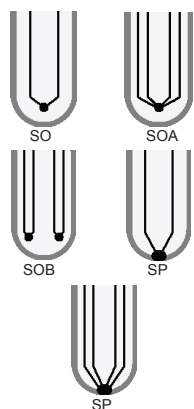

Tolerance for classes of sensors with resistors Pt acc. to PN-EN 60751

Sensor classes	Range of application [°C]	Formula for calculating acceptable deviations [°C]
AA	-50+250	$T = \pm(0,10 + 0,0017 t)$
A	-100+450	$T = \pm(0,15 + 0,002 t)$
B	-196+600	$T = \pm(0,3 + 0,005 t)$
C	-196+600	$T = \pm(0,06 + 0,01 t)$

|t| - absolute value of temperature

Measurement circuit

1 x Pt100			2 x Pt100			1 x TC	2 x TC
2-wire	3-wire	4-wire	2-wire	3-wire	4-wire	2-wire	2-wire
✓	✓	✓	✓	✓	x	✓	✓

Tolerance for thermocouple classes acc. to PN-EN 60584


Thermocouple type	Class 1		Class 2	
	Range of application [°C]	Tolerance [°C]	Range of application [°C]	Tolerance [°C]
J Fe-CuNi	from -40 to +375 from +375 to +750	±1,5 ±0,004 t	from -40 to +333 from +333 to +750	±2,5 ±0,0075 t
K NiCr-NiAl	from -40 to +375 from +375 to +1000	±1,5 ±0,004 t	from -40 to +333 from +333 to +1200	±2,5 ±0,0075 t

|t| - absolute value of temperature

Connection head types


Connection head type BA in standard.

Possibility to mount the connection head of different type.

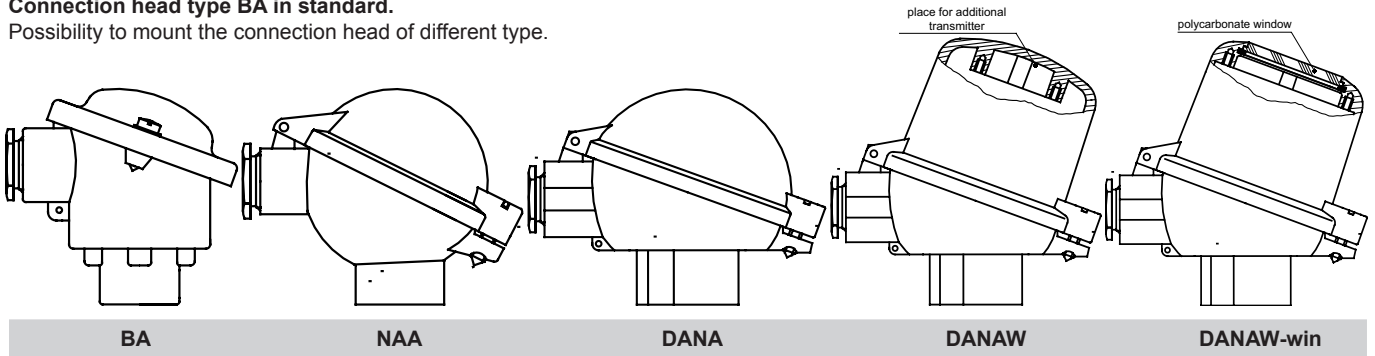


Connection schemes

Pt100 (thermometric resistor)

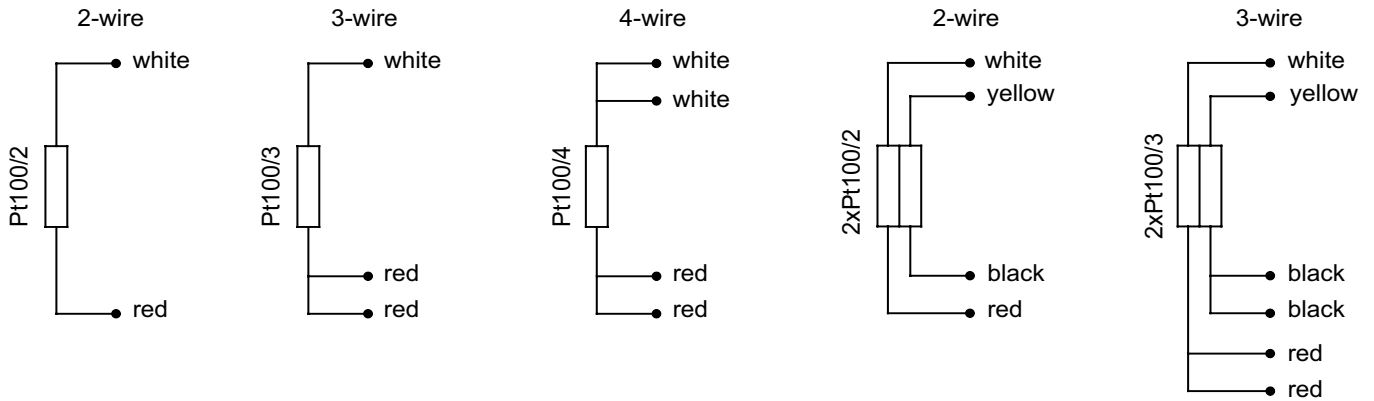



TC (thermocouple)

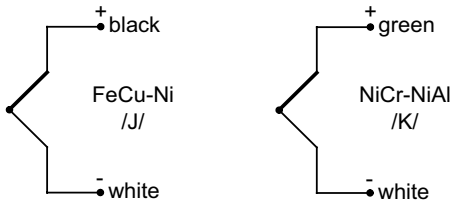

In double sensors one of thermocouples is additionally marked out.

Transmitters

Local LED display

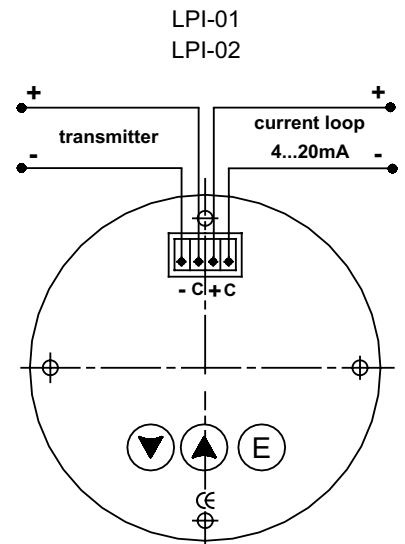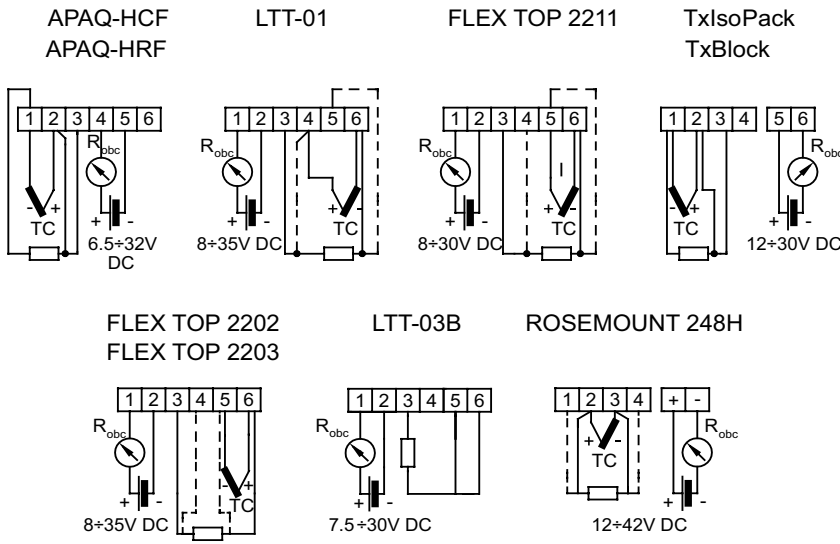

Product code

			Sensor version	
			AP	with transmitter
			2AP	with two transmitters
0	<input type="text"/>		APW	with display
			no designation	single with pipe insert
			2	double with pipe insert
			P	single with mineral insulated insert
1	<input type="text"/>		2P	double with mineral insulated insert
			Sensing element	
			OP	resistor Pt
			TJ	thermocouple Fe-CuNi /J/
			TK	thermocouple NiCr-NiAl /K/
2	<input type="text"/>			other parameters acc. to requirements
			Thermocouple hot junction type	
			SO	insulated hot junction
			SP	grounded hot junction
			SOA	one hot junction for two thermocouples insulated from the sheath
3	<input type="text"/>		SOB	hot junctions insulated from each other and from the sheath
			Thermowell length	
			100	100mm
			160	160mm
			200	200mm
			250	250mm
4	<input type="text"/>			other parameters acc. to requirements
			Thermowell diameter	
			9	ø9mm
			11	ø11mm
5	<input type="text"/>			other parameters acc. to requirements
			Dimension of process connection thread	
			M20x1,5	metric thread M20x1,5
			G½	pipe thread (inch) G½
6	<input type="text"/>			other parameters acc. to requirements
			Accuracy	
			A or B	for measuring resistor
			1 or 2	for thermocouple
7	<input type="text"/>			
			Measurement circuit (for resistor)	
			2	2 - wire
			3	3 - wire
8	<input type="text"/>		4	4 - wire
			Transmitter type (optionally)	
			Tx	head mounted transmitter TxBlock
9	<input type="text"/>			other parameters acc. to requirements
			Temperature range of transmitter	
			(0÷100°C)	transmitter configured for temperature range 0÷100°C
10	<input type="text"/>			other parameters acc. to requirements

0	1	2	3	4	5	6	7	8	9	10
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

T **GN-11** - - - - - - - - - -

Ordering example: **2TOPGN-11-250-9-G½-A-3** double sensor with resistor Pt100, class A, 3-wire connection, thermowell diameter d=9mm and length L=250mm with process connection G½.