


IQ SENSOR NET MIQ modules for outputs, inputs and communication

Module to transfer the measured values or with a alert/alarm function – thanks to the modular principle and simple installation this is individually customizable

We would like to inform you about the application range on our website

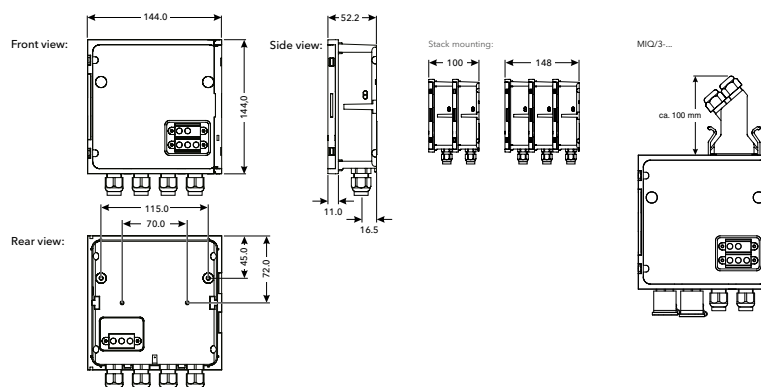

Technical Data

Models MIQ module	MIQ/3-MOD	MIQ/3-PR	MIQ/CR3	MIQ/C6	MIQ/R6	MIQ/IC2
MIQ Module Coupling at Front	Combined mechanical and electrical connection for rapid docking and removal of the MIQ/TC 2020 3G Terminal/Controller (configured as Terminal) and for docking additional modules					
MIQ Module Coupling at Rear	Combined mechanical and electrical connection, for rapid coupling to MIQ modules, up to 3 modules as a stack mounted unit possible					
Cable Feeds	3 screw cable glands M 16 x 1.5 and 1 USB		4 screw cable glands M 16 x 1.5			
Terminal Connections	Screw terminal strips Terminal area for solid conductors: 0.2 ... 4.0 mm² Terminal area for flexible conductors: 0.2 ... 2.5 mm² accessible by opening cover					
IQ SENSOR NET Terminal Connections	Terminal connections for the IQ SENSOR NET are available on each module and can be used as required: - for connecting sensors - as an input/output or for looping through/branching of the IQ SENSOR NET cable					
Other Functions	Two LEDs, yellow and red, for monitoring the operating voltage of the IQ SENSOR NET; IQ SENSOR NET connection, Integrated local identity function; Integrated switchable terminal resistor (SN terminator)					
Electric Supply	Directly via the IQ SENSOR NET					
Ambient Conditions	Operating temperature: -4 °F ... 131 °F (-20 °C ... +55 °C); Storage temperature: -13 °F ... 149 °F (-25 °C ... +65 °C)					
Housing Material	PC - 20 % GF (polycarbonate with 20 % fiberglass)					
Protection Rating	IP 66	IP 66	IP 67	IP 66	IP 67	IP 66
	corresponding to NEMA 4X (not for direct conduit connections). Conduits need to be connected with flexible adapters (CC-Box), respectively with adapters CC-PM..					
Dimensions (W x H x D)	5.67 x 5.67 x 2.05 in. (144 x 144 x 52 mm)					
Weight	Approx. 1.1 pounds (0.5 kg)					
Certifications	ETL, cETL (conforms with relevant UL and Canadian standards), CE					
Electromagnetic Compatibility	EN 61326-1, Class B; FCC Class A					
Integrated Overvoltage Protection	According to EN 61326-1 enhanced overvoltage protection for the entire system, implemented in each component					
Connection Medium Cable	IQ SENSOR NET cable SNCIQ or SNCIQ/UG (underground cable with additional PVC coating): 2-wire with shield; 2 x 0.75 mm²; Filler cord for easy connection of shield: 0.75 mm²; pressure resistant to 10 bar					
Connection Characteristics	Energy and data transfer via 2 wire technique; resistant to reversed polarity; Comprehensive EMC shield control; cable topology within IQ SENSOR NET system as required, e.g. in the form of a line, tree, star, multiple star; Total cable length: max. 1000 m/1094 yds (without signal amplifying), with signal amplifying module MIQ/JBR additional 1000 m/1094 yds (max 3000 m/3282 yds)					
Warranty	3 years for defects of quality					

Model	Description	Order No.
MIQ/3-MOD	Module IQ with MODBUS RTU / RS 485 connection (output module, digital)	471026
MIQ/3-PR	Module IQ with PROFIBUS-DP connection (output module, digital)	471027
MIQ/R6	Module IQ / relay 6 with 6 relay outputs (output module, analog)	480013
MIQ/CR3	Module IQ / current relay 3, with 3 power and 3 relay outputs output module (analog)	480014
MIQ/C6	Module IQ / Current 6 with 6 power outputs (output module, analog)	480015
MIQ/IC2	Module IQ / input Current 2 with 2 inputs for 0/4 - 20 mA signals (input module); every populated power input counts as an IQ sensor	480016