




Analog pH/ORP armature SensoLyt®

pH/ORP armature for SensoLyt® electrodes, with overvoltage protection and integrated temperature sensor

We would like to inform you about the application range on our website

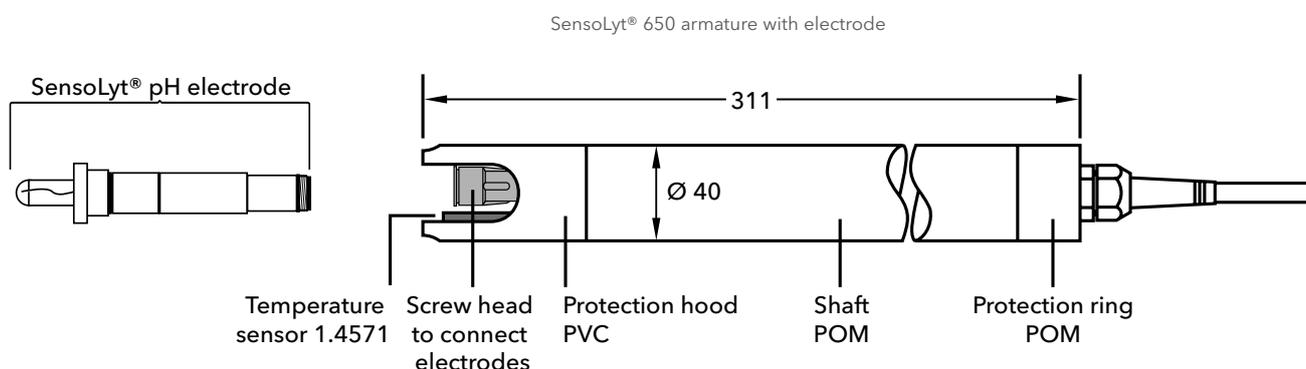

Technical Data

Model	SensoLyt® 650
Measuring principle	Potentiometric
Measuring Range	4 ... 12 pH (armature)
Integrated preamplifier	No
Signal output	High-impedance
Temperature Measurement	Integrated NTC 0 ... +60 °C
Pressure Resistance	10 bar
Ambient Conditions	Operational temperature: 0 ... +60 °C
Electrical Connection	Integrated PUR connection cable with 7-pole screw plug
Certifications	CE
Mechanical	Sensor shaft: POM; Protection hood: PVC; Protection rate IP 68
Weight (without cable)	Approx. 320 g
Warranty	2 years on defects in quality according to § 10 terms of conditions

Model	Description	Order No.
SensoLyt® 650-7	pH/ORP armature with high-impedance signal transmission and integrated temperature sensor, cable length 7 m	109195

